

## MarineProtect<sup>™</sup>-Primer

#### Product information




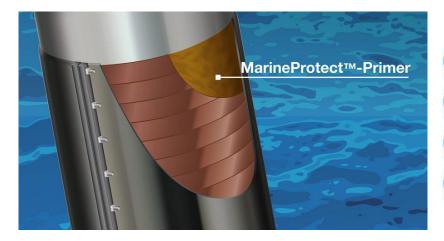


## Special advantages:









# Primer mastic for the protection of metal, concrete and wooden piles and underwater pipes.

DEKOTEC GmbH stands for experience, quality and reliability in the field of corrosion prevention and sealing technology. The success is based on the development of the Petrolatum-Tape which was already developed in 1927 as the first product worldwide for passive corrosion prevention of pipelines. We establish and guarantee the highest quality standards with technically trend-setting products. Research, development and production take place exclusively in Germany. Our employees are continuously implementing safe and individual solutions in a personal cooperation with the customer.

## Description

#### MarineProtect™-Primer

represents the basic corrosion and weathering prevention in the systems MarineProtect™-100 and MarineProtect™-2000 FD for the corrosion and weather prevention of piles or pipes in water and in the splash water area.

MarineProtect™-Primer is a versatile system that can easily be applied to piles made from **metal**, **concrete and wood** and pipelines laid under water.

The MarineProtect™-Primer is based on a **natural wax** and permits a good moistening of the steel surface even under the water surface. By spreading the primer, the water is displaced from the steel surface and a moisture barrier is created, which prevents a continuation of the steel corrosion.

MarineProtect™-Primer only needs little surface preparation and therefore permits a fast and economic coating. After the

application of MarineProtect™Primer, the surface is prepared for
the wrapping with **MarineProtect™- Tape**. Indentations and
irregularities can be filled and
closed with the MarineProtect™Primer

The MarineProtect<sup>™</sup>-Primer is outstandingly qualified for the coating of new as well as for the rehabilitation of existing constructions.



## Processing

Before the application of

MarineProtect™-Primer, the
surface of the pile must be cleaned
of rust and all lose attachments and
non-adhesive residues of previous
paintings and coatings as well as
from organic vegetation.
We recommend the use of water
blasting or sandblasting to achieve
the best possible coating quality.

After the cleaning of the surface, the coating with MarineProtect™-Primer should be started immediately to

prevent a renewed generation of rust or organic vegetation.
MarineProtect™-Primer can be processed manually or by using a palette- knife or a similar tool. The entire surface of the pile should be covered with a thin layer. The area consumption of MarineProtect™-Primer is approximately 350 g/m². After coating with MarineProtect™-Primer, the surface is no longer in direct contact with water and it is prepared for the additional coating

with MarineProtect™-Tape and MarineProtect™-Jacket.

MarineProtect™-Primer, -Tape and -Jacket together create a permanent and durable corrosion prevention system even under severe conditions of waves, strong winds and UV light.

Additional information is included in the processing recommendations of MarineProtect™-100 and MarineProtect™-2000 FD, available under <a href="https://www.dekotec.com">www.dekotec.com</a>.

## Typical product properties

Property	Unit	Typical value	Test method
Density	g/cm³	ca. 0,90	ISO 2811
Dripping point	°C (°F)	≥+100 (≥+210)	DIN 51801
Area consumption	kg/m²	ca. 0,35	
Operating temperature	°C (°F)	-40 bis +70 (-40 bis +158)	

## Ordering information and packaging

MarineProtect™-Primer: 10 kg bucket

## Storage

When stored in its original, unopened packaging, **MarineProtect™-Primer** can be stored for at least 60 months after the manufacturing date.

Storage temperature: ≤ +40°C (+104°F)

Felderstrasse 24 | 51371 Leverkusen | Germany